

Overhang counter stream swim units
Oorhang-teenstroom-swimeenhede

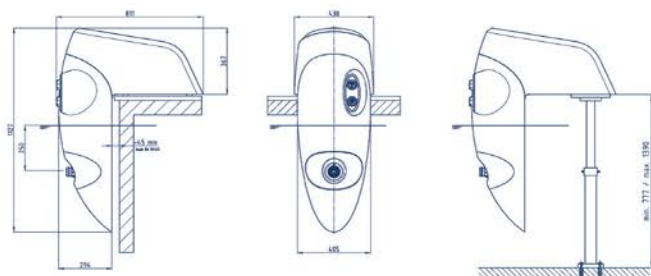
Technical data at 50 Hz under reserve! / Tegniese data teen 50 Hz onder reservasie!	BADU® Jet perla	BADU® Jet riva	BADU® Jet stella
Jet / Pump	21-81/31 G	21-81/32 G / 21-81/32 RG	21-81/33 G
Flow rate of pumps (m ³ /h)	40/40	58/54	75
Voltage	3 N~400/230V / 1~230V	3 N~400/230V / 1~230V	3 N~400/230V
Power input P ₁ (kW)	2.10/2.30	3.30/2.90	3.80
Power output P ₂ (kW)	1.60/1.60	2.60/2.20	3.00
Flow pressure at nozzle (bar)	0.90/0.90	1.10/1.00	1.00
Flow velocity in center			
2m from the nozzle (m/s)	1.10/1.10	1.20/1.15	1.40
Massage pressure max. (bar)	1.20/1.20	1.60/1.60	1.60
Number of nozzles diameter 40mm	1/1	1/1	2
Omnidirectional swivel nozzle (degrees)	60	60/60	60
Approx. weight (kg)	41	52	54
^{*)} with telescopic support	36/41/39 ^{*)} /44 ^{*)}	52/52/55 ^{*)} /55 ^{*)}	54/60

Code/Kode	Description/Beskrywing	Voltage/ Spanningtrek
231.7600.000	BADU® Jet perla with LED white	1~230V
231.7620.000	BADU® Jet perla with LED multicolour	1~230V
231.7500.000	BADU® Jet perla with LED white	3 N~400/230V
231.7520.000	BADU® Jet perla with LED multicolour	3 N~400/230V
231.8600.000	BADU® Jet riva with LED white	1~230V
231.8620.000	BADU® Jet riva with LED multicolour	1~230V
231.8500.000	BADU® Jet riva with LED white	3 N~400/230V
231.8520.000	BADU® Jet riva with LED multicolour	3 N~400/230V
231.9500.000	BADU® Jet stella with LED white	3 N~400/230V
231.9520.000	BADU® Jet stella with LED multicolour	3 N~400/230V

DIMENSIONAL DRAWING / DIMENSIONELE SKETS

Dimensions in mm / Afmetings in mm.

Dimensions valid for versions with 1 and with 2 nozzles / Afmetings van toepassing op modelle met 1 en 2 spuitpompe

BADU® Jet perla / BADU® Jet riva

BADU® Jet stella
