

DOUBLE DISCONNECT BOARD 2500A DDU-2500A

To be used in conjunction with the standard Double Disconnect control unit:

DDU-CONTROL



- This Double disconnect board is designed for the connection and protection of a PV System with input not exceeding a total of 2500A (990KW)
- This double disconnect unit is controlled by the standard double disconnect control unit which is a standard control unit for all the double disconnect units.
- Once coupled with the double disconnect control unit the connection between the utility grid and the PV Solar system is monitored by an independent grid monitoring relay and can be configured according to the required Country Grid Code for its intended use. A secure grid disconnection is required by series connection of two independently switched air circuit breaker. The switching control is obtained from the Grid Monitoring Relay installed in the control enclosure
- This board is supplied pre-wired with the installer only required to connect the combined output from the PV system, and the Utility side of the installation
- These double disconnect units are delivered with settings already set to suit the South African grid code.
- The enclosure provides excellent protection against the elements.
- Pre-wired internal switchgear improves the system installation time.


Segen Solar (Pty) Ltd Reserves the right to implement changes to specifications depicted in this datasheet to conform to equipment or regulatory requirements

DOUBLE DISCONNECT UNIT

Technical Data

| Item Number | | DDU-2500A |
|----------------------------------|------------------------|---------------------|
| Inverter Connection | | 3W+N+E |
| Circuit breaker current rating – | Adjustable | 2500A |
| Main Output | | |
| Number of inputs | | 1 |
| Number of Outputs | | 1 |
| Enclosure material | | Mild Steel |
| Enclosure material thickness | | 1.6mm |
| Enclosure Colour | | B26 Orange |
| Door opening | Double Door | Lever Lock |
| Internal cover plate | Lexan | Yes |
| Internal components pre-wired | | Yes |
| Panel AC fault level | | 50kA |
| System voltage | | 400V |
| IP Rating | | IP65 |
| Earth Bar | | Yes |
| Dimensions | Height/Width/Depth(mm) | 2000 x 1600 x 600 |
| Mounting | Plinth | 300 x 1600 x 600 |
| Disconnect type | | Air Circuit Breaker |

NB: All equipment to be installed and operated by qualified personnel only

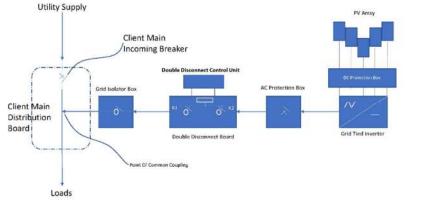



245 Masjien Street Strijdom Park, Randburg www.segensolar.co.za

Segen Solar (Pty) Ltd Reserves the right to implement changes to specifications depicted in this datasheet to conform to equipment or regulatory requirements